
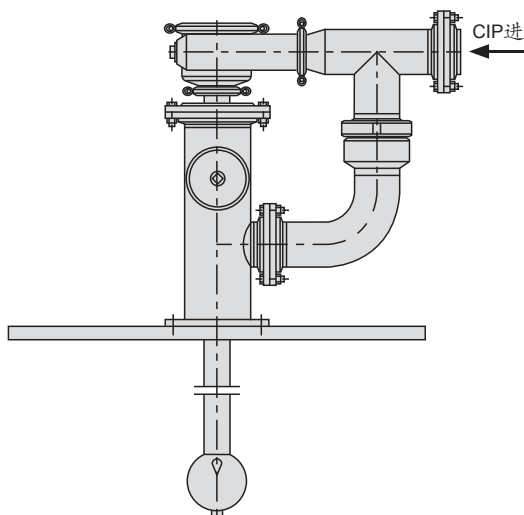


罐用产品系列 Tank Product Series

罐用安全组件

型号type: GAZ-03

Tank Assembling Parts

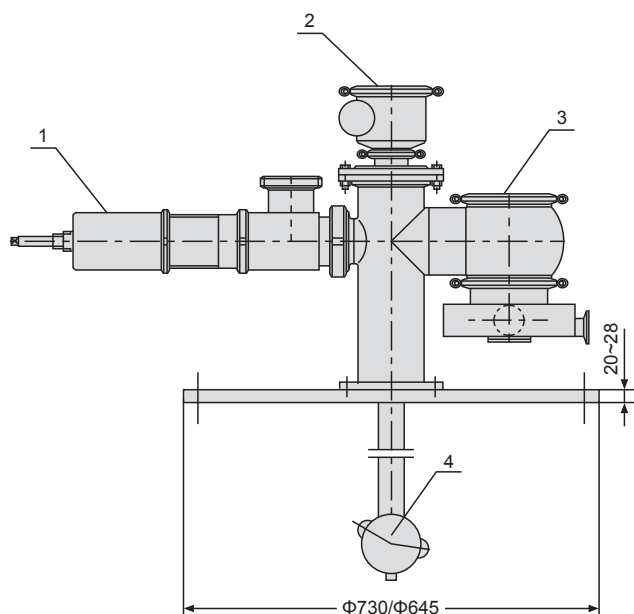

组成部分

- 1、弹簧压力调节阀
- 2、旋转喷球清洗机构
- 3、防止真空阀
- 4、清洗球

Possible equipment

- 1、Pressures valve
- 2、Rolling cleaning ball
- 3、Check vacuum valve
- 4、Spray ball



技术参数 Tech Pata


使用温度: $-10^{\circ}\text{C} \sim +120^{\circ}\text{C}$
 Temperature range: $-10^{\circ}\text{C} \sim +120^{\circ}\text{C}$
 压力调节阀排气压力: $0 \sim 4\text{bar}$
 Pressures valve exhaust pressure: $0 \sim 4\text{bar}$
 防止真空阀开启压力: 0.025bar 低压时气体密封
 Open valve pressure: 0.025bar
 清洗球清洗压力: $2.3 \sim 4.3\text{bar}$
 Cleaning pressure: $2.3 \sim 4.3\text{bar}$
 喷射直径: $2 \sim 10\text{m}$
 Spray diameter: $2 \sim 10\text{m}$
 流量: $7 \sim 29\text{m}^3/\text{h}$ Flow: $7 \sim 29\text{m}^3/\text{h}$
 带有自清洗槽 Self cleaning channel

罐用清洗装置 Tank Product Series

罐用安全组件

型号type: GAZ-04

Tank Assembling Parts

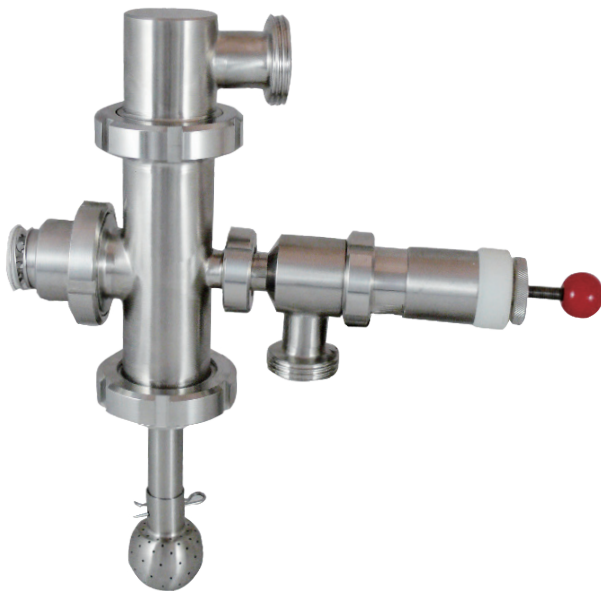

组成部分

- 1、清洗机构
- 2、防止真空阀
- 3、安全阀
- 4、清洗球

Possible equipment

- 1、Pressures valve
- 2、Check vacuum valve
- 3、Safety valve
- 4、Spray ball

技术参数 Tech Pata

使用温度: $-10^{\circ}\text{C} \sim +120^{\circ}\text{C}$

Temperature range: $-10^{\circ}\text{C} \sim +120^{\circ}\text{C}$

防止真空阀开启压力: 0.01176bar


Open valve pressure: 0.01176bar

安全阀控制压力: 0.5~2bar

Safety valve pressure: 0.5~2bar

清洗球清洗压力: 3bar


Cleaning pressure: 3bar

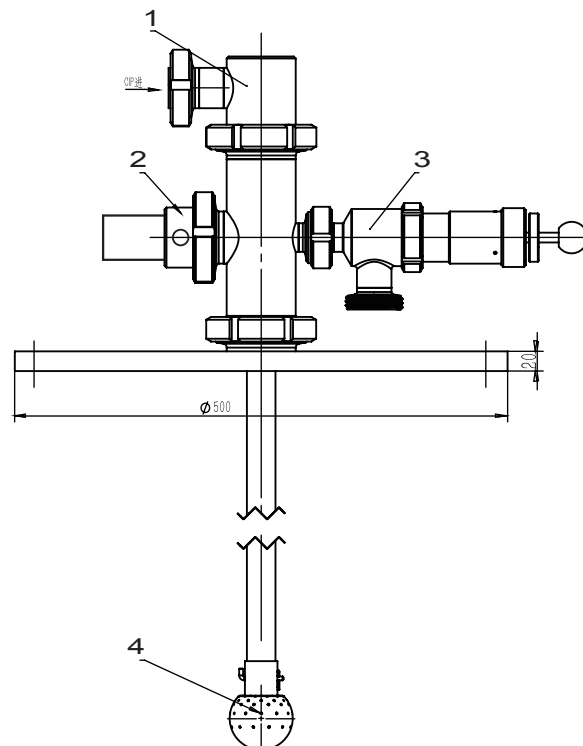

罐顶安全组件

型号type: GAZ-01

Air Cleaning Combination

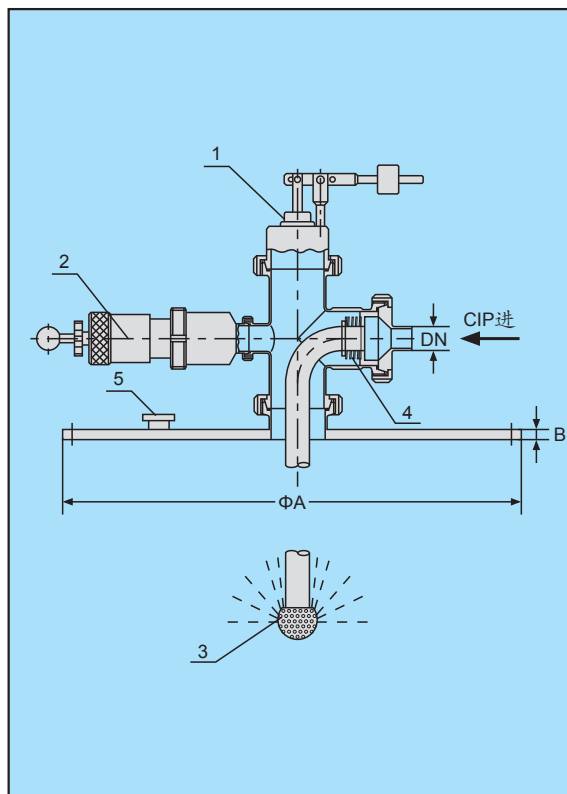


规格size	A	B	C	D	E	F
DN40	600-720	20-25				
50	600-720	20-25				
65	600-720	20-25				
80	600-720	20-25				
组成部分		Possible Equipment				
1、防止真空阀		1、Vacuum Valve Check				
2、安全阀		2、Safety Valve				
3、清洗球		3、Spray Ball				
4、止回阀		4、Check Valve				
5、视镜		5、Sight Glass				

罐顶安全组件

型号type: GAZ-02

Air Cleaning Combination

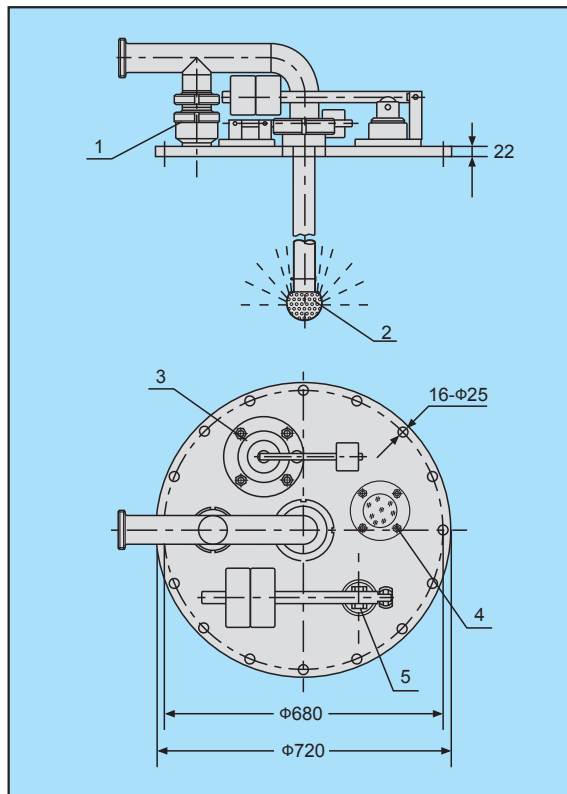


组成部分	Possible Equipment
1、气液分流器	1、Gas-Liquid Splitter Valve
2、清洗球	2、Spray Ball
3、防止真空阀	3、Vacuum Valve Check
4、视镜	4、Sight Glass
5、自动排气阀	5、Auto-exhaust Valve
使用温度: -10℃~+120℃	
Temperature Range:-10℃~+120℃	
自动排气阀开启压力: 0.5~1.5bar	
Open Valve Pressure:0.5~1.5bar	
防止真空阀开启压力: 0.01176bar	
Open Valve Pressure:0.01176bar	
气液分流器清洗工作压力: 3bar	
working pressure:3bar	
根据罐的容积选配不同通径的排气阀和真空阀	

防止真空阀

型号type: DFK-02

Vacuum Valve

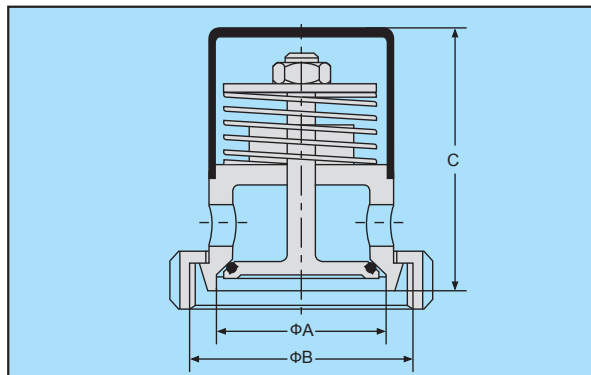


规格size	A	B	C	D	E	F
DN40	37	Rd65×1/6"	90			
50	49	Rd78×1/6"	97			
65	66	Rd95×1/6"	113			
80	81	Rd110×1/4"	120			
100	100	Rd130×1/4"	160			

防止真空阀

型号type: DFK-04

Vacuum Valve

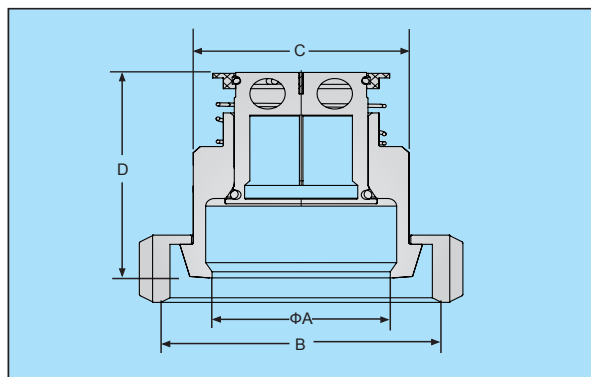


规格size	A	B	C	D	E	F
DN50	50	Rd78×1/6"	81	67		

防止真空阀

型号type: DFK-03

Vacuum Valve

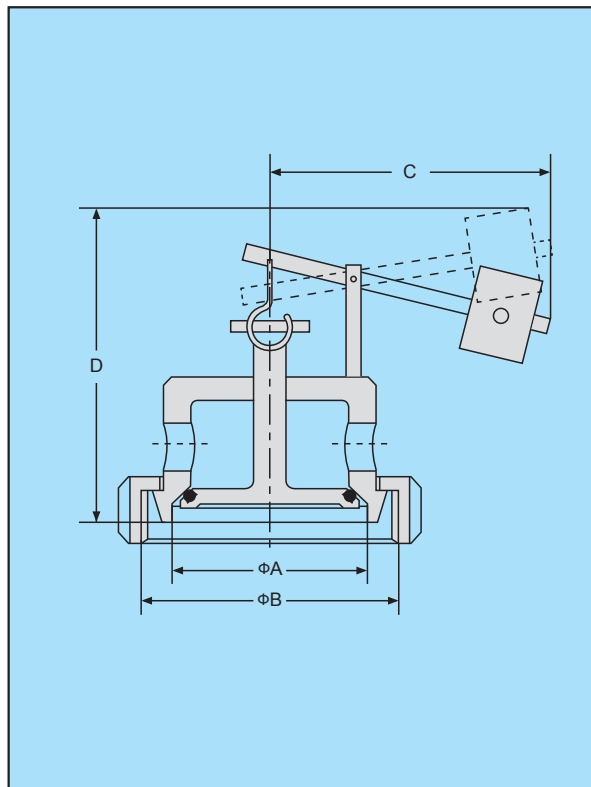

规格size	A	B	C	D	E	F
DN40	37	Rd65×1/6"	70	85		
50	49	Rd78×1/6"	80	105		
65	66	Rd95×1/6"	92	130		
80	81	Rd110×1/4"	111	140		
100	100	Rd130×1/4"	135	218		